




# 5/4x6 EDGE-GROOVED DECKING

## DARK RED MERANTI - SELECT AND BETTER

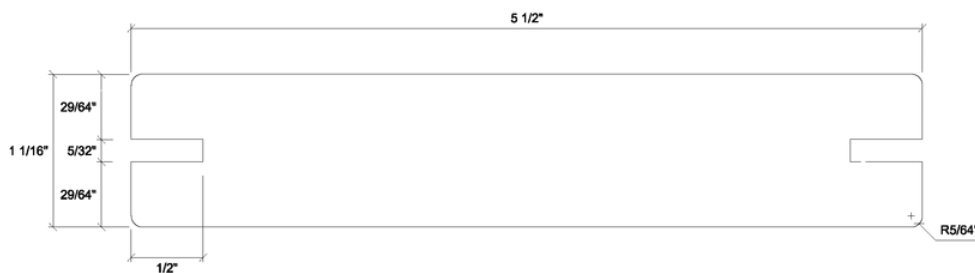

## SPECIFICATIONS

|                          |                                                          |
|--------------------------|----------------------------------------------------------|
| Application              | Decking, hidden fastener compatible                      |
| Profile                  | S4S/E4E                                                  |
| Nominal Size             | 5/4"x6"                                                  |
| Net Size                 | 1-1/16"x5-1/2"                                           |
| Lengths                  | 8-16'(even lengths only), 17/18/19/20'                   |
| Moisture Content         | 12%                                                      |
| Density                  | 42-48 lbs/cu.ft                                          |
| Static Bending Strength  | 11,960 psi                                               |
| Modulus of Elasticity    | 1,860,000 psi                                            |
| Shear, parallel to grain | 1490 psi                                                 |
| Janka Hardness           | 1350-1600 lbf                                            |
| Tangential Shrinkage     | 6.6%                                                     |
| Radial Shrinkage         | 3.4%                                                     |
| Flame Spread Index       | 25-35 (Class-A Fire Rating certificate available online) |

figures are an average of multiple specimens tested

## INSTALLATION

Scan to download  
installation guide:



## CERTIFICATION

All Blue Star products are 100%  
MTCC/PEFC certified and carry MTCS  
Chain of Custody certification



Blue Star Products, USA  
7910 Unit B West Gate Blvd  
Austin, TX 78745, USA

[www.bluestardecks.com](http://www.bluestardecks.com)  
 [info@bluestardecks.com](mailto:info@bluestardecks.com)  
 (512) 953-3849

Document no. BS-CS-546G  
Revision A  
Date 07/2026